


FULLY-INTEGRATED SECURITY



NETWORKEDIO
DATASHEET

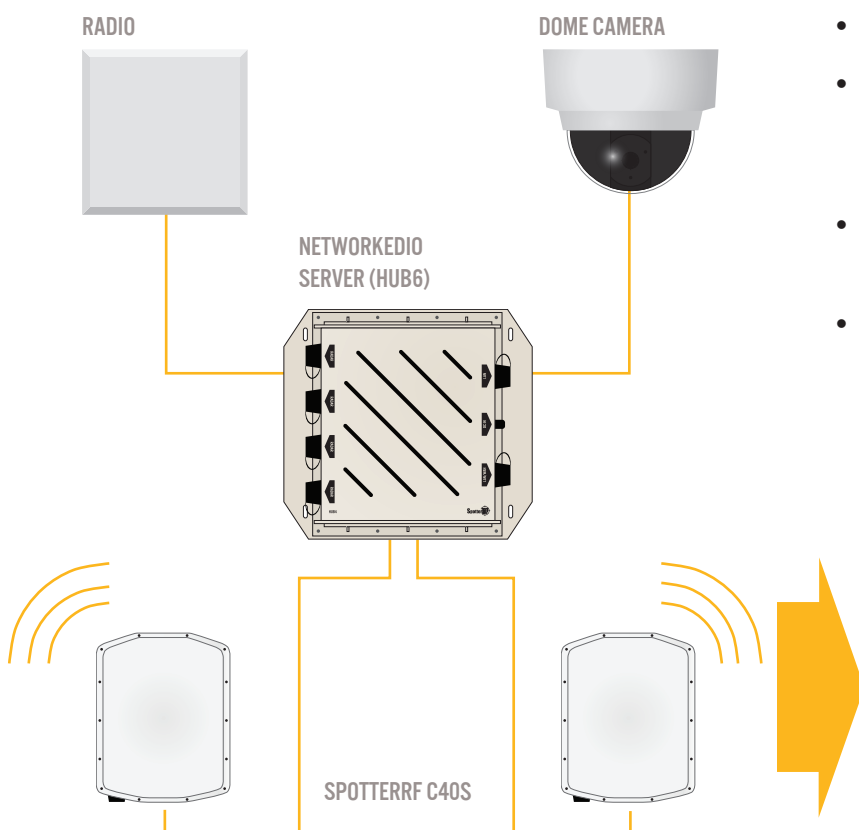


- Accepts tracks from SpotterRF radar.
- Intuitive, browser-based user interface compatible with Linux, Mac, or Windows.
- Get threat notifications by email immediately after detection.
- Motion-detecting radar cues camera to start recording video.



FOR MORE INFORMATION, CONTACT:
sales@spotterrf.com
813-319-4550
spotterrf.com



FULLY-INTEGRATED SECURITY



NETWORKEDIO PRODUCT FAMILY	CC8A	CC8B	HUB4B	RACK MOUNT SERVER
DIMENSIONS	10.125 x 9.25 x 2.5 in 25.72 x 23.5 x 6.35 cm	5.375 x 2.375 x 2 in 11.1 x 6 x 5 cm	10.125 x 9.25 x 2.5 in 25.72 x 23.5 x 6.35 cm	23 in x 19 in. x 2 in. 58.4 cm x 48 cm x 5 cm
WEIGHT	2.18 lbs	.5 lbs	3.5 lbs	
NUMBER OF DEVICES SUPPORTED	10	10	10	Up to 75
NUMBER OF ZONES	50	50	50	200
RUGGED/WATERPROOF	IP67/NEMA 6P compliant	DIN rail mounted	IP67/NEMA 6P compliant	Standard 18" rack mount
SWITCHED OUTPUTS	8 dry contacts	2 dry contacts and 6 digital outputs	3 pass-through PoE ports and a 802.3AT/AF port	None
DRYCONTACT POWER RATING	Up to 250 Watts at 250 VAC, 2 A maximum.	Up to 250 Watts at 250 VAC, 2 A maximum.	N/A	N/A
SYSTEM POWER REQUIREMENTS	7 Watts @ 12–30 VDC w/ PoE injector	7 Watts @ 5 VDC	7 Watts @ 12–30 VDC w/ PoE injector	
OPERATIONAL TEMPERATURE RANGE	-30° C to 55° C	-30° C to 65° C	-30° C to 65° C	

COORDINATE THE EFFORTS OF MULTIPLE SECURITY DEVICES



In this potential waterfront setup, a CC8A coordinates the efforts of two rotating cameras and two SpotterRF radars. Movement toward the dam in the low-alert zone and any movement in the high alert zone triggers an alert and cues one of the two rotating cameras to start recording video.

FOR MORE INFORMATION, CONTACT:

sales@spotterrf.com
813-319-4550
spotterrf.com

